

Features

- ◆ Operating temperature: -40 to +85°C
- ◆ 1.5/3.0kVdc isolation
- ◆ 100% burn-in
- ◆ No external component required
- ◆ UL94V-0 package
- ◆ RoHS compliance

Typical Applications


- ◆ Intelligent control, power monitoring equipment, security facilities, radio and television appliances power isolation & transform
- ◆ RS485/232, CAN bus interface, power supply isolation and other digital communication circuit
- ◆ Power ground circulation & interference suppression

General Description

A/E-2W is unregulated single output series, in use can be simply understood as a common frequency transformer (see functional diagram), the only difference is that it can achieve the DC to DC voltage conversion. The family offers a variety of standard voltage combinations, isolation voltage 1.5/3.0kVdc two grades.



Functional Diagram

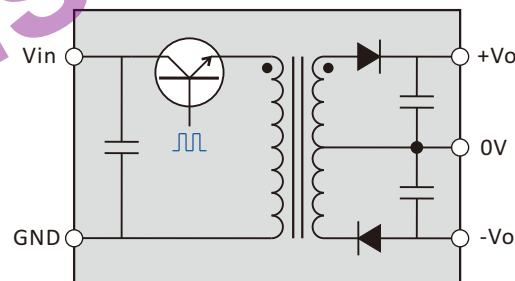

Selection Guide

A 05 05 S - 2W

Product Series	Input Voltage	Output Voltage	Package Style	Rated Power
A: isolated 1.5kVdc dual E: isolated 3.0kVdc dual	05 = 5Vdc 12 = 12Vdc 24 = 24Vdc 48 = 48Vdc	05 = ±5Vdc 09 = ±9Vdc 12 = ±12Vdc 15 = ±15Vdc 24 = ±24Vdc	S,MS: single in-line D: dual in-line	2W = 2Watt

A-2W & E-2W Series

2w, fixed input, isolated & unregulated dual output dc-dc converter




Input Specifications					
Item		Min	Typ	Max	Units
Input Surge Voltage (1 sec max)	5V input	-0.7		7	Vdc
	12V input	-0.7		15	
	24V input	-0.7		28	
	48V input	-0.7		54	
Reverse Polarity Input Current				0.4	A
Internal Power Dissipation				0.45	W
Input Filter	"C" filter				

Output Specifications						
Item	Test Conditions	Min	Typ	Max	Units	
Output Power	Ta=-40-+85°C	0.2		2	W	
Line Regulation	For vin change of ±1%			±1.2	%/%	
Load Regulation	Nominal 10%-100% load		10.5	15	%	
		5V output		8.3		15
		9V output		6.8		15
		12V output		6.3		15
		15V output		5		15
24V output						
Output Voltage Accuracy	See Tolerance Envelope Graph					
Temperature Drift	Nominal, 100% load			0.03	%/°C	
Ripple & Noise	DC-20MHz bandwidth		150	300	mVp-p	
Switching Frequency	Nominal, 100% load	80	100	130	KHz	
Short Circuit Protection				1	S	

Isolation Specifications					
Item	Test Conditions	Min	Typ	Max	Units
Isolation Resistance	Test at 500Vdc	1000			MΩ
Isolation Voltage	Tested for 1S and 1mA max	1500			Vdc
		3000			

Common Specification					
Item	Test Conditions	Min	Typ	Max	Units
Operating Temperature		-45		+85	°C
Maximum Case Temp.				55	
Storage Temperature		-50		+130	
Lead Temperature	1.5mm from case for 10 seconds			+300	
Storage Humidity				95	%
Case Material	Black Plastic (UL94V-0)				

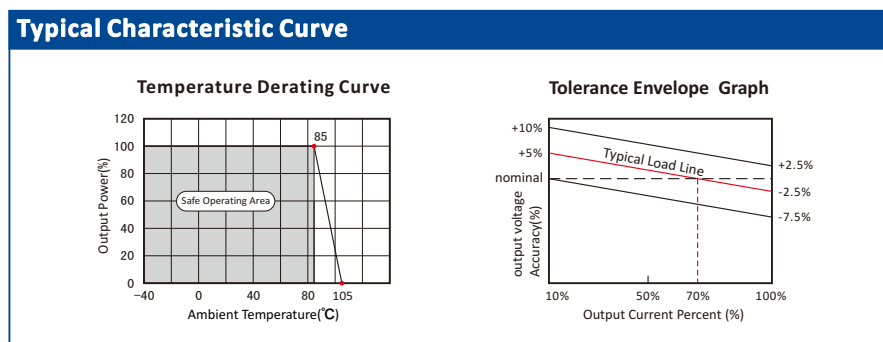


Application Note

1. Requirement On Output Load

To ensure this DC/DC can operate efficiently and reliably, during operation, the minimum output load is not less than 10% of the full load, and that **this product should never be operated under no load!** If the actual output power is very small, please connect a resistor with proper resistance at the output end in parallel to increase the load.

2. Output filter

The DC/DC without any external filter components in the case that can be stable and reliable work. If you want to further reduce ripple and improve the EMC, please connect a external filter circuit at the inputs and outputs (see figure). General, recommended values 10-100uF with input capacitor, and recommended values with output capacitor see the following table.

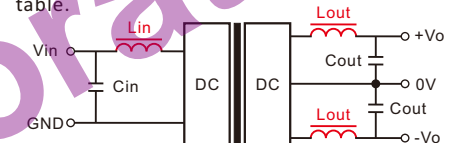

"Lin, Lout" not required, recommended values 4.7-22uH

Table 1

Cin	Cout		
10~100uF	±5V	4.7uF	
	±9V	2.2uF	
	±12V	1uF	
	±15V	0.47uF	
	±24V	0.47uF	

It's not recommended to connect any external capacitor in the application field with less than 0.5 watt output.

If the maximum external output capacitor still does not meet your requirements of ripple may be required connect the filter inductor (see figure), Lout values recommended 4.7-100uH. It should be noted "LC" filtering network natural frequency should be staggered with the DC/DC operating frequency to avoid mutual interference.

4. This product cannot be used in parallel, can not hot-swappable.

A_S-2W & E_S-2-1W Series

2w, fixed input, isolated & unregulated dual output dc-dc converter



Product Program

Model	Input		Output				Eff (%)	Certificate	Mechanical Dimensions First Angle Projection	
	Voltage(Vdc)		Voltage(Vdc)	Current(mA)		Ripple (mVp-p)				
	Nominal	Range	Nominal	Max	Min					
A0505S-2W	5	4.5~5.5	±5	±200	±20		80	 Weight: 2.1g	 Isolation: 1500Vdc Note: all size units mm, diameter of all terminal 0.5mm, distance between all adjacent terminal 2.54mm	
A0509S-2W			±9	±111	±12		80			
A0512S-2W			±12	±83	±9		82			
A0515S-2W			±15	±67	±7		82			
A0524S-2W			±24	±42	±5		85			
A1205S-2W	12	10.8~13.2	±5	±200	±20		80	 Weight: 2.1g	 Isolation: 1500Vdc Note: all size units mm, diameter of all terminal 0.5mm, distance between all adjacent terminal 2.54mm	
A1209S-2W			±9	±111	±12		80			
A1212S-2W			±12	±83	±9		82			
A1215S-2W			±15	±67	±7		82			
A1224S-2W			±24	±42	±5		85			
A2405S-2W	24	21.6~26.4	±5	±200	±20		80	 Weight: 2.1g	 Isolation: 1500Vdc Note: all size units mm, diameter of all terminal 0.5mm, distance between all adjacent terminal 2.54mm	
A2409S-2W			±9	±111	±12		80			
A2412S-2W			±12	±83	±9		82			
A2415S-2W			±15	±67	±7		82			
A2424S-2W			±24	±42	±5		85			
E0505S-2W	5	4.5~5.5	±5	±200	±20		80	 Weight: 2.1g	 Isolation: 3000Vdc Note: all size units mm, diameter of all terminal 0.5mm, distance between all adjacent terminal 2.54mm	
E0509S-2W			±9	±111	±12		80			
E0512S-2W			±12	±83	±9		82			
E0515S-2W			±15	±67	±7		82			
E0524S-2W			±24	±42	±5		85			
E1205S-2W	12	10.8~13.2	±5	±200	±20		80	 Weight: 2.1g	 Isolation: 3000Vdc Note: all size units mm, diameter of all terminal 0.5mm, distance between all adjacent terminal 2.54mm	
E1209S-2W			±9	±111	±12		80			
E1212S-2W			±12	±83	±9		82			
E1215S-2W			±15	±67	±7		82			
E1224S-2W			±24	±42	±5		85			
E2405S-2W	24	21.6~26.4	±5	±200	±20		80	 Weight: 2.1g	 Isolation: 3000Vdc Note: all size units mm, diameter of all terminal 0.5mm, distance between all adjacent terminal 2.54mm	
E2409S-2W			±9	±111	±12		80			
E2412S-2W			±12	±83	±9		82			
E2415S-2W			±15	±67	±7		82			
E2424S-2W			±24	±42	±5		85			



A_MS-2W & E_MS-2-1W Series

2w, fixed input, isolated & unregulated dual output dc-dc converter





Product Program

Model	Input		Output				Eff (%)	Certificate	Mechanical Dimensions First Angle Projection											
	Voltage(Vdc)		Voltage(Vdc)	Current(mA)		Ripple (mVp-p)														
	Nominal	Range	Nominal	Max	Min															
A0505MS-2W	5	4.5~5.5	±5	±200	±20		80	 Weight: 1.8g												
A0509MS-2W			±9	±111	±12		80													
A0512MS-2W			±12	±83	±9		82													
A0515MS-2W			±15	±67	±7		82													
A0524MS-2W			±24	±42	±5		85													
A1205MS-2W	12	10.8~13.2	±5	±200	±20		80													
A1209MS-2W			±9	±111	±12		80													
A1212MS-2W			±12	±83	±9		82													
A1215MS-2W			±15	±67	±7		82													
A1224MS-2W			±24	±42	±5		85													
A2405MS-2W	24	21.6~26.4	±5	±200	±20		80													
A2409MS-2W			±9	±111	±12		80													
A2412MS-2W			±12	±83	±9		82													
A2415MS-2W			±15	±67	±7		82													
A2424MS-2W			±24	±42	±5		85													
								<table border="1"> <tr> <td>Pin</td> <td>1</td> <td>2</td> <td>4</td> <td>5</td> <td>6</td> </tr> <tr> <td>Function</td> <td>Vin</td> <td>GND</td> <td>-Vo</td> <td>0V</td> <td>+Vo</td> </tr> </table>	Pin	1	2	4	5	6	Function	Vin	GND	-Vo	0V	+Vo
Pin	1	2	4	5	6															
Function	Vin	GND	-Vo	0V	+Vo															
E0505MS-2W	5	4.5~5.5	±5	±200	±20		80	 Weight: 1.8g												
E0509MS-2W			±9	±111	±12		80													
E0512MS-2W			±12	±83	±9		82													
E0515MS-2W			±15	±67	±7		82													
E0524MS-2W			±24	±42	±5		85													
E1205MS-2W	12	10.8~13.2	±5	±200	±20		80													
E1209MS-2W			±9	±111	±12		80													
E1212MS-2W			±12	±83	±9		82													
E1215MS-2W			±15	±67	±7		82													
E1224MS-2W			±24	±42	±5		85													
E2405MS-2W	24	21.6~26.4	±5	±200	±20		80													
E2409MS-2W			±9	±111	±12		80													
E2412MS-2W			±12	±83	±9		82													
E2415MS-2W			±15	±67	±7		82													
E2424MS-2W			±24	±42	±5		85													
								<table border="1"> <tr> <td>Pin</td> <td>1</td> <td>2</td> <td>5</td> <td>6</td> <td>7</td> </tr> <tr> <td>Function</td> <td>Vin</td> <td>GND</td> <td>-Vo</td> <td>0V</td> <td>+Vo</td> </tr> </table>	Pin	1	2	5	6	7	Function	Vin	GND	-Vo	0V	+Vo
Pin	1	2	5	6	7															
Function	Vin	GND	-Vo	0V	+Vo															

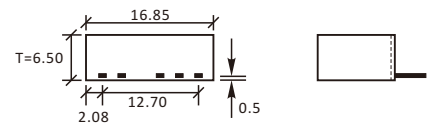

Isolation: 1500Vdc
 Note: all size units mm, diameter of all terminal 0.5mm, distance between all adjacent terminal 2.54mm

Pin	1	2	4	5	6
Function	Vin	GND	-Vo	0V	+Vo

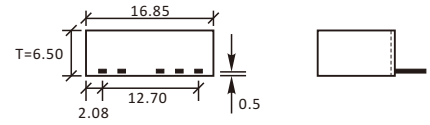

Isolation: 3000Vdc
 Note: all size units mm, diameter of all terminal 0.5mm, distance between all adjacent terminal 2.54mm

Pin	1	2	5	6	7
Function	Vin	GND	-Vo	0V	+Vo

A_D-2W & E_D-2W Series

2w, fixed input, isolated & unregulated dual output dc-dc converter



Product Program

Model	Input		Output				Eff (%)	Certificate	Mechanical Dimensions First Angle Projection	
	Voltage(Vdc)		Voltage(Vdc)	Current(mA)		Ripple (mVp-p)				
	Nominal	Range	Nominal	Max	Min					
A0505D-2W	5	4.5~5.5	±5	±200	±20		80		Weight: 2.5g	
A0509D-2W			±9	±111	±12		80			
A0512D-2W			±12	±83	±9		82			
A0515D-2W			±15	±67	±7		82			
A0524D-2W			±24	±42	±5		85			
A1205D-2W	12	10.8~13.2	±5	±200	±20		80		Isolation: 1500Vdc Note: all size units mm, diameter of all terminal 0.5mm, distance between all adjacent terminal 2.54mm	
A1209D-2W			±9	±111	±12		80			
A1212D-2W			±12	±83	±9		82			
A1215D-2W			±15	±67	±7		82			
A1224D-2W			±24	±42	±5		85			
A2405D-2W	24	21.6~26.4	±5	±200	±20		80		Pin 1 7 8 9 11 14	
A2409D-2W			±9	±111	±12		80			Function
A2412D-2W			±12	±83	±9		82			GND
A2415D-2W			±15	±67	±7		82			NC
A2424D-2W			±24	±42	±5		85			0V
								+Vo	-Vo	Vin
E0505D-2W	5	4.5~5.5	±5	±200	±20		80		Weight: 2.5g	
E0509D-2W			±9	±111	±12		80			
E0512D-2W			±12	±83	±9		82			
E0515D-2W			±15	±67	±7		82			
E0524D-2W			±24	±42	±5		85			
E1205D-2W	12	10.8~13.2	±5	±200	±20		80		Isolation: 3000Vdc Note: all size units mm, diameter of all terminal 0.5mm, distance between all adjacent terminal 2.54mm	
E1209D-2W			±9	±111	±12		80			
E1212D-2W			±12	±83	±9		82			
E1215D-2W			±15	±67	±7		82			
E1224D-2W			±24	±42	±5		85			
E2405D-2W	24	21.6~26.4	±5	±200	±20		80		Pin 1 7 8 9 11 14	
E2409D-2W			±9	±111	±12		80			Function
E2412D-2W			±12	±83	±9		82			GND
E2415D-2W			±15	±67	±7		82			NC
E2424D-2W			±24	±42	±5		85			0V
								+Vo	-Vo	Vin

File Release Notes

DBN-104 Technical Data Sheet Version



No.	Version	Data	Description
1	V0	2011/11/01	First release
2	V1	2012/02/06	Increase AxxxxMS-2W/BxxxxMS-2W model
3			
4			
5			

Delus Corporation

1. All data in addition to particular things, are Ta = 25°C, humidity<75%, nominal input voltage and output measured at rated load;
2. Non-standard models with some of the following indicators may be different from the specific circumstances of the Secretary to direct contact with me;
3. In the use of this manual, if some of them do not quite understand terms please refer to our <<DC / DC Converter Application Guide>>;
4. The Company focused on technological improvements, product specifications and parameter updates without notice, to pay attention to the latest information on website: www.delus.cn

All Delus Corporation's products are manufactured, assembled and tested utilizing ISO9001 quality systems.
For information regarding Delus Corporation and its products please see www.delus.cn